SLE 42

Overall Length: 4077 (mm)
Overall Width: 1500 (mm)
Overall Height: 2450 (mm)
Track Width: 230 (mm)
Track Length: 1850 (mm)
Body Width: 1355 (mm)

TECHNICAL PARAMETERS

THE FEATURE		
Engine Brand	Kubota 1703	
Rated Power	18.2	(kw)
Side Swing	Standard Side Swing	
Cab	Driving Cab	
Pedrail	Rubber Track	
Accessories	Toolbox	
SPECIFICATION		
Overall weight	2.9	(t)
Digging Bucket Capacity	0.03	(m^3)
Bucket Width	500	(mm)
Traveling Motor	Ruili/Lipton	
Travel Speed	High: 4.0/Low: 2.2	(km/h)
Swing Motor	Ruili/Lipton	
Swing Speed	8r/min	(rpm)
Hydraulic system	Piston pump: Taifeng Load sensitive valve: Taifeng	
Body Swing Radius	858	(mm)
Body Swing Angel	360	
Boom Swing Angel (L/R)	60°/45°	
Max. Grade Ability	15°	(%)
Fuel Tank	34	(L)
Hydraulic Oil Tank	30	(L)
WORKING RANGE		
Max. Digging Radius	4520	(mm)
Max Digging Depth	2456	(mm)
Max. Digging Height	4155	(mm)
Max. Unloading Height	2840	(mm)
Min. Swing Radius	2135	(mm)
Max. Digging Depth Of Dozer Blade	367	(mm)
Max. Lifting Height Of Dozer Blade	330	(mm)

OPTION

Engine, Cab, Track, Telescopic Chassis, Air Conditioning, High And Low Speed Motors

LED Display

Protect Road Surface

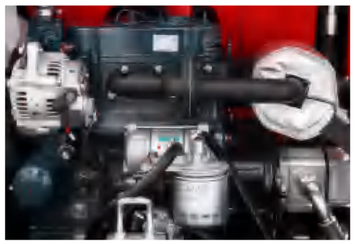

Powerful & Reliable