SLRR 1000

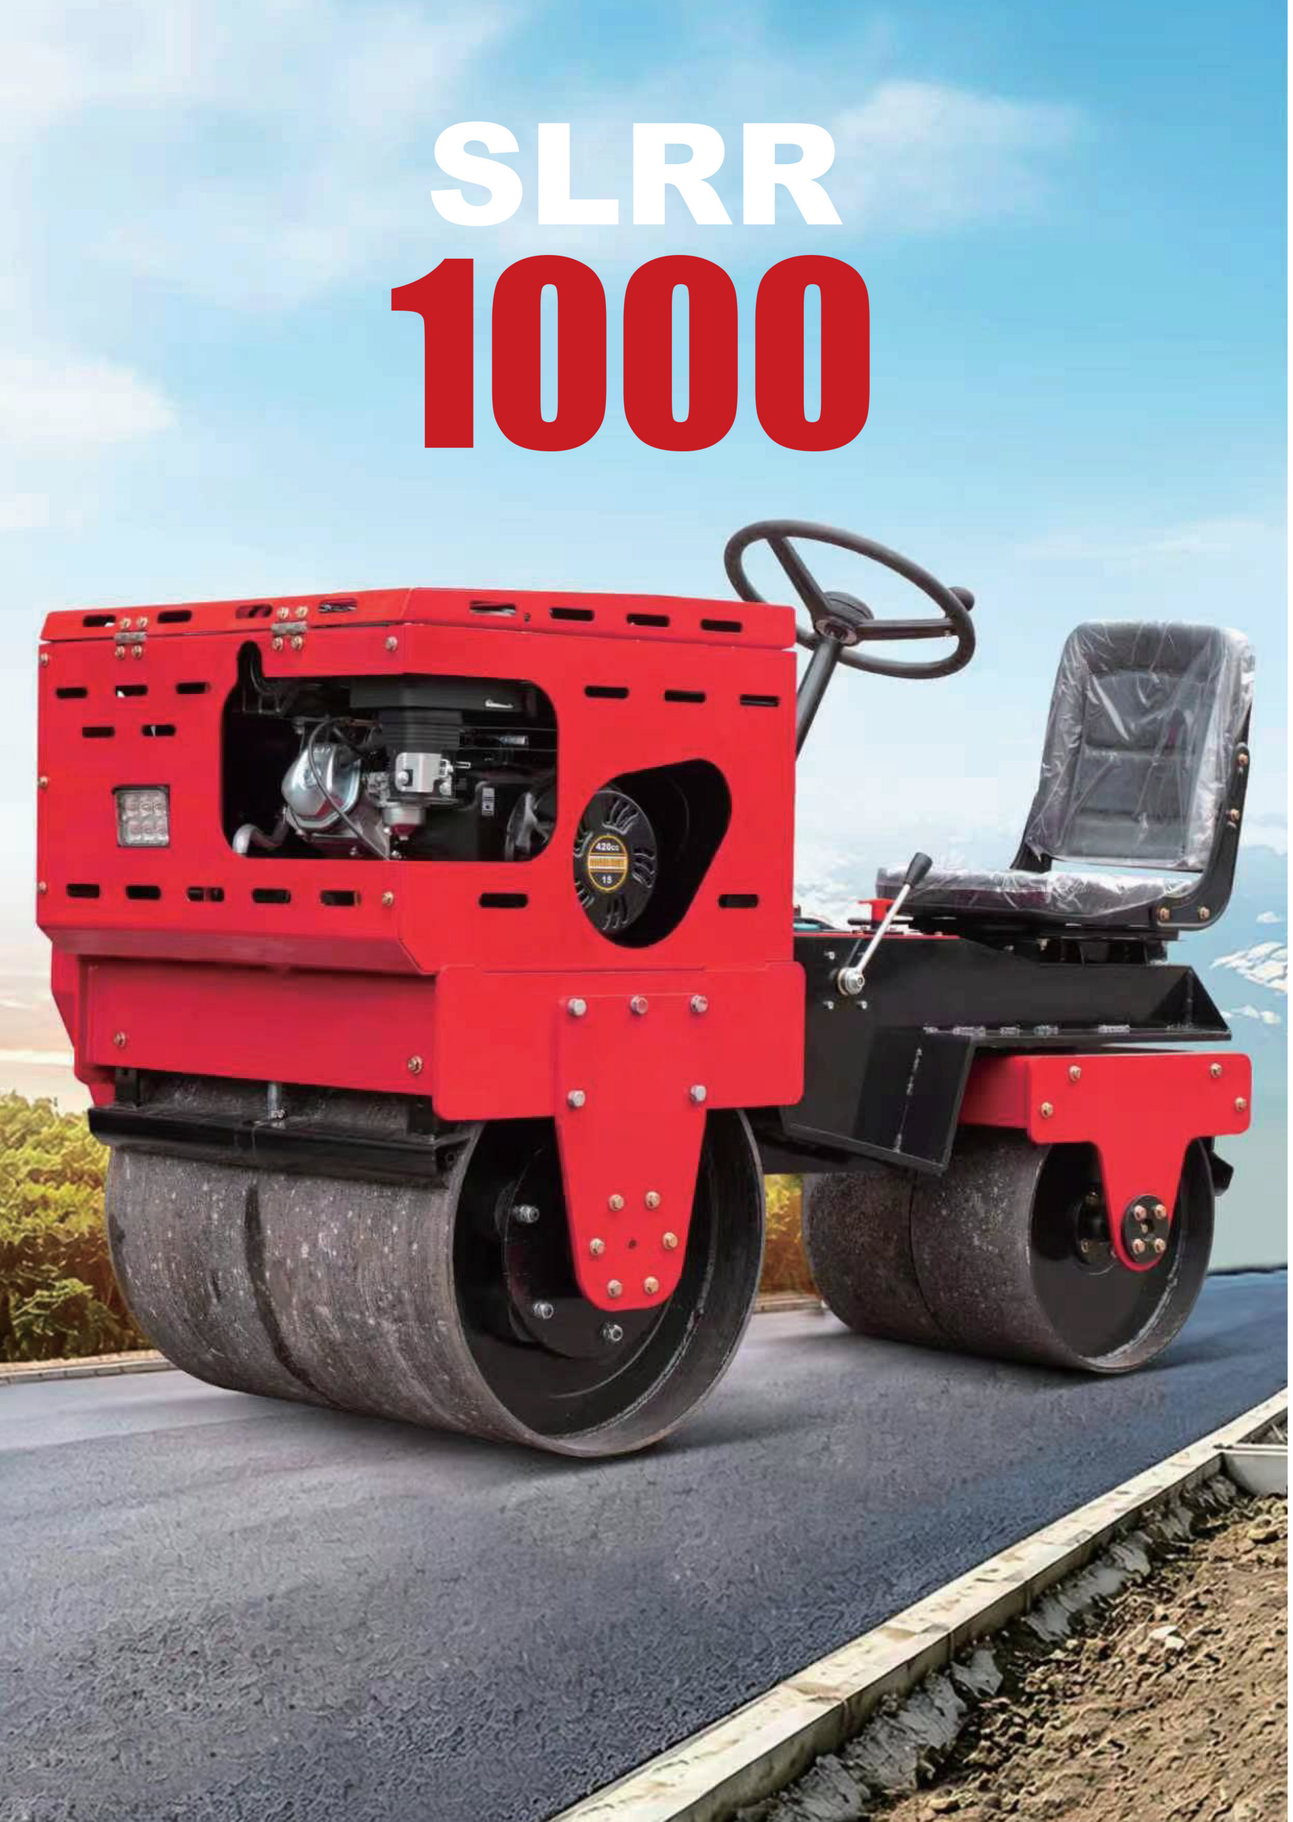

TECHNICAL PARAMETERS

BASIC PERFORMANCE		
Operating Weight	560	(kg)
Centrifugal Force	35	(kn)
Amplitude	0.6	(mm)
Vibration Frequency	70	(hz)
Travel Speed	0-6	(km/h)
Gradeability	30	(%)
Overall Dimensions	1800*850*1250	(mm)
Drum Size	Drum Length 800, Diameter 560	(mm)
Engine Model	Runtong R420	
Emission Standard	EPA / EURO 5	
Engine Power	8.5 kw / 3600 r/min	(hp/kw)
Drive Mode	Single-drive Hydraulic	
Vibration System	Full Hydraulic	

BODY & CAPACITY		
Engine Oil Refill Volume	1.1	(L)
Fuel Type	Gasoline	
Fuel Grade	92# (RON 92)	
Fuel Tank Capacity	6.5L (Engine-mounted Tank)	(L)
Water Tank Capacity	16.5	(L)
Hydraulic Oil Tank Capacity	8	(L)

DETAIL DISPLAY

Precise Agile Turn

Uniform Compaction

Sensitive Control

Wear-Resistant

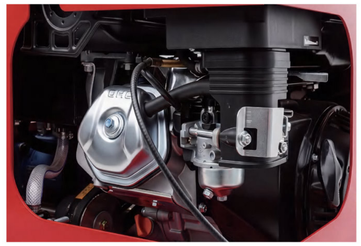

Powerful & Reliable